



DOSATRON®


WATER POWERED DOSING TECHNOLOGY

40 GPM: D8R Product Specifications

Dilution Range:	1:500 to 1:50 (.2% to 2%)
Water Flow Range:	2.2 to 40 GPM
Operating Pressure Range:	2 to 110 PSI
Available Housing Materials:	Polyacetal (Standard Blue)
Dimensions:	23" x 12"
Weight:	12 lbs
Connection Size:	1 1/2" NPT
Maximum Temperature:	104° F
Included Accessories:	6 ft clear suction tube, strainer, weight, mounting bracket and operating manual
Recommended Accessories:	200 mesh filter, check valve.



Basic Installation

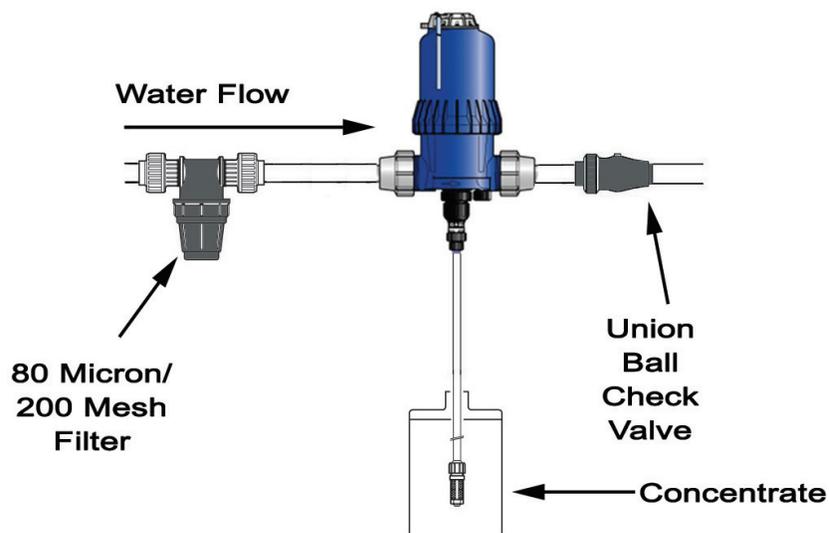

Dosatron International
2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatronusa.com

Dosatron International, Inc. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards by Dosatron International S.A.S., part of United Technologies Corporation, U.S.A.