

March 2013


Product

Clear Vinyl Tubing

Advantages

Applications include: air conditioning and refrigeration condensate drains, condensate pump discharge lines and humidifier overflows.

- Several sizes from 1/4" to 1" diameter
- Non-toxic clear vinyl chloride
- Extra rigid design resists crimping and kinking due to durometer value of 80 (Shore A) and thicker wall
- Maximum service temperature 140° F (60° C)
- Better performance in cold weather climates

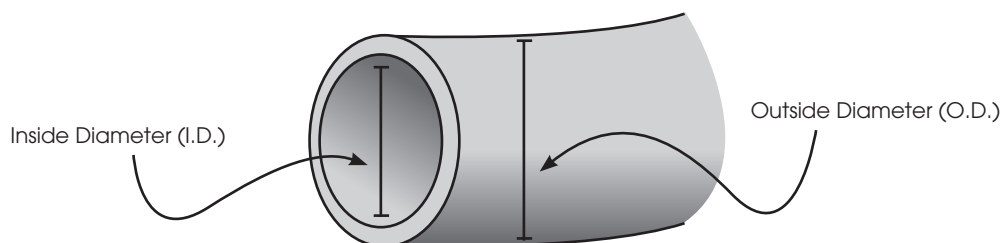

CATALOG NUMBER	DESCRIPTION	ORDER MULTIPLE
7-14	1/4", .250" I.D., .360" O.D., .055 wall thickness	100ft./box
7-38	3/8", .375" I.D., .495" O.D., .060 wall thickness	100ft./box
7-12	1/2", .500" I.D., .631" O.D., .066 wall thickness	100ft./box
7-58	5/8", .625" I.D., .771" O.D., .073 wall thickness	100ft./box
7-34	3/4", .750" I.D., .913" O.D., .082 wall thickness	100ft./box
7-78	7/8", .875" I.D., 1.050" O.D., .088 wall thickness	50ft./box
7-10	1", 1.000" I.D., 1.215" O.D., .108 wall thickness	50ft./box